

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

#4

In re Application of:

Ann Kerstin Birgitta Kjellqvist, et al

Serial No.: 10/022,716

Filing Date: December 18, 2001

For: PROCESS FOR COATING A SUBSTRATE

Assistant Commissioner for Patents
Washington, D.C. 20231


Docket: ACO2844US

Examiner:

Group Art Unit: 1762

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as First-Class mail in an envelope addressed to:
Assistant Commissioner for Patents
Washington, DC 20231
on 2/7/02

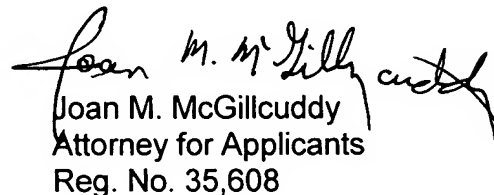

Angelique Anderson

SUBMISSION OF CERTIFIED COPY OF PRIORITY DOCUMENT

Sir:

Enclosed herewith is a certified copy of European Patent Application No. 00204622.5 dated December 19, 2000 in connection with the above-identified application.

Respectfully submitted,


Joan M. McGillcuddy
Attorney for Applicants
Reg. No. 35,608

Akzo Nobel Inc.
Intellectual Property Dept.
7 Livingstone Avenue
Dobbs Ferry, New York 10522
(914) 674-5463

THIS PAGE BLANK (USPTO)



**Eur päisches
Patentamt**

**European
Patent Office**

**Office eur péen
des brevets**



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00204622.5

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE, 12/12/01
LA HAYE, LE

THIS PAGE BLANK (USPTO)



Eur päisches
Patentamt

Eur pean
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 00204622.5

Anmeldetag:
Date of filing: 19/12/00
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Akzo Nobel N.V.
6824 BM Arnhem
NETHERLANDS

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Process for coating a substrate

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:	Tag:	Aktenzeichen:
State:	Date:	File no.
Pays:	Date:	Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
D21J1/08, D21H23/00, B05D7/06

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

EPA EPO-OEB DG 1 Recu		
19. 12. 2000		
11		ANL ZEICHN

ACO 2844 PDEP

PROCESS FOR COATING A SUBSTRATE

5

The present invention relates to a process for coating a wooden, wood-like and/or cellulose containing substrate, for example solid wood, veneer of wood, impregnated paper or reconstituted wood substrates.

- 10 Reconstituted wood substrates are substrates produced from wood particles, fibers, flakes or chips, such as, a hardboard, a medium density fiberboard, an oriented strand board also known as wafer board, a flake board, a chipboard and a particleboard. Such a reconstituted wood substrate is typically fabricated under heat and pressure from particles, fibers, flakes or chips. A reconstituted
- 15 wood substrate is normally produced by treating particles, flakes, chips or fibers with a binder and then arranging these treated particles, flakes, chips or fibers in the form of a mat under dry or wet conditions. The mat is then compressed into a dense substrate, typically in a sheet form, by the application of heat and pressure. In this compression step the mat is compressed to less than 10% of
- 20 its original thickness, i.e. the thickness of the substrate is compressed by more than 90%. In the wet process, the water is pressed from the mat during this compression step, in the dry process the particles are closely pressed together. The binder binds particles, flakes, chips or fibers and enhances the structural strength and integrity of the reconstituted wood substrate and its water
- 25 resistance. The reconstituted wood substrate, if desired, may be molded into a desired shape or provided with a textured surface, such as, wood grain texture. Typical examples of reconstituted wood substrates are hardboard, Medium Density Fiberboard (MDF), High Density Fiberboard (HDF), and chipboard.

- 30 A problem encountered by coating a wooden, wood-like and/or cellulose containing substrate is the relatively high absorption of a paint into the substrate. This enhances the paint consumption of such substrates in

ACO 2844 PDEP

2

comparison to low or non-absorbing substrates. Further, the relative large amount of paint necessary to coat the substrate results in a longer overall drying time and a larger amount of solvent that has to evaporate from the coating layer.

5

Nowadays, a primary concern in the coating industry is the need to reduce the emission of solvents, in particular volatile hydrocarbons into the air.

The present invention is directed to a process for coating a wooden, wood-like and/or cellulose containing substrate with a lower paint consumption. In order to achieve this, the process according to the invention comprises the steps of:

- a) applying a press coating to the substrate;
- b) applying heat and pressure to the coated substrate to cure the press coating and to obtain a substrate with a smooth coating film, whereby the pressure is such that the substrate is not substantially compressed;
- c) applying a top coat on the substrate after the curing of the press coating; and
- d) curing said top coat.

For the purpose of the present application a pressure that is such that the substrate is not substantially compressed is a pressure whereby the average thickness of the substrate is reduced by less than 10% of its original value.

A process whereby the substrate is not substantially compressed includes any process whereby the substrate is locally compressed by more than 10%, but wherein the average thickness of the substrate is reduced by less than 10% of its original value. Such local compression can occur when a special pattern is applied to the substrate in the step wherein heat and pressure is applied to the substrate.

ACO 2844 PDEP

3

In the process according to the present invention a press coating is used to seal the surface of the substrate and to lower the paint absorption of the surface. Normally the press coating is applied as an aqueous colloidal dispersion also referred to as a polymer latex emulsion. Such press coating
5 comprises particles of a polymer of an ethylenically unsaturated monomer, the polymer having a T_g in the range of 10 to 100°C, and filler and/or pigment particles.

A polymerized latex emulsion suitable for producing a smooth hard coating on the surface or edge of the substrate comprises from 10 percent to 60 percent
10 by weight of the emulsion solids of polymer particles of a polymer of an ethylenically unsaturated monomer, the polymer having T_g in the range of 10°C to 100°C and from 40 percent to 60 percent by weight of the emulsion solids of pigment and/or filler particles.

The press coating normally not only provides a smooth coating on the surface
15 and/or edges of the substrate, but also a layer that improves the adhesion between the substrate and any further coating layers that are applied to the substrate.

The latex emulsion can be applied to the substrate by conventional means,
20 such as, a curtain coater, spray nozzle, roller coater, flow coater or by extrusion, which is particularly useful for coating edges. The layer can be applied on more than one side of the substrate, such as, front and back or along the edges of a substantially planar substrate or on the surface of a contoured substrate, such as, a molding or molded door panel.

25 Optionally, to accelerate the evaporation of water from the latex emulsion, the substrate is preheated before application of the latex emulsion at a temperature in the range of 30 - 80 °C, preferably 40 - 60 °C, during 10 seconds to 5 minutes.

ACO 2844 PDEP

4

The latex layer is dried into a hard ned layer by reducing the moisture content of the layer. Normally, the layer is dried to a moisture content in the range of 0 to 20 percent by weight of the solid content of the layer. An applicable drying temperature and drying time is suitably adjusted for the polymerized latex emulsion being used and the thickness of the applied layer. The applicable drying temperature typically varies from ambient temperature to 120°C, preferably from 50°C to 80°C. The drying time is correspondingly reduced for higher applicable drying temperatures and extended for lower applicable drying temperatures. Conventional drying means, such as, a convection air drying oven or a conveyer belt passing through a tunnel heated by infrared lights, are suitable.

The dried layer is then pressed for some time at a pressure that varies in the range from 0.1 N/mm² to 3.5 N/mm², preferably from 0.14 N/mm² to 2.0 N/mm². The coated layer can be heated during this pressing action. The temperature and time are adjusted to prevent thermal decomposition of the resultant coating or substrate or sticking of the coating to the press platens. The applicable temperature typically varies from 20°C to 300°C.

After the pressing step or simultaneously therewith, the latex layer is cured for an applicable cure time and an applicable cure temperature suitable for the polymerized latex emulsion used. The cure time and temperature are adjusted to prevent thermal decomposition of the resultant coating or substrate. The applicable cure temperature typically varies from 20°C to 300°C, preferably from 170°C to 235°C, and the applicable cure time varies from 120 minutes to 1 to 5 seconds, preferably from 30 minutes to 1 minute.

The cure step is conducted preferably simultaneously under an applicable cure pressure suitable for the polymerized latex emulsion being used. The applicable cure pressure varies from 0.1 N/mm² to 3.5 N/mm², preferably from 0.14 N/mm² to 2.0 N/mm². The applicable cure temperature varies from 50°C to 250°C, preferably from 150°C to 200°C. The applicable cure time varies from 0,1

ACO 2844 PDEP

5

seconds to 5 minutes. Conventional hot pressing means, such as, a molding press having pneumatically or hydraulically pressurized heated platens is suitable for a batch operation and conventional hot pressing means, such as, a pair of heated calendar rolls, series of heated calendar rolls, a pair of parallel positioned heated conveyer belts, or UV curing lights, may be used for a continuous operation by squeezing the substrate therethrough. Calendering at elevated temperature is the preferred process for simultaneous pressing and curing of the press coating.

- 10 The thus obtained smooth coating film on the substrate is then used to apply a next coating layer, for example a top coat. In principle there is no restriction to the coating composition that can be used as a top coat, as long as there is a good adhesion between the top coat and the coating film on top of the substrate. Both pigmented and pigment free coating compositions can be used
- 15 for the top coat. In view of the reduction of the amount of solvent released during the drying and curing of the top coat, preference is given to the use of a high solids solvent borne coating, a waterborne coating or a hot melt coating. Since the preparation of coated substrates according to the present invention on an industrial scale is preferably done within a relatively short time frame, the curing and drying time of the top coat should be as short as possible. The
- 20 curing and drying of the top coat can be accelerated by heating the substrate, but in view of the heat-sensitive nature of the substrate, this is not always possible. Therefore, preference is given to the use of a radiation curable top coat which can be cured in a reasonable short time without the necessity to
- 25 heat the substrate too much.

Normally, the use of a radiation curable coating composition for the coating of wooden, wood-like and/or cellulose containing substrates is not advised since the coating composition will penetrate into the pores, and since the radiation does not reach these areas, uncured coating material is the result. This can

30 give health, safety, and environmental problems, e.g., when the substrate is cut

ACO 2844 PDEP

6

or sanded. These problems occur even years after the lacquer has been applied.

However, in the process according to the present invention a press coating is applied onto the substrate before the radiation curable coating composition is applied. This press coating effectively prevents the penetration of a radiation curable coating composition into the substrate.

Within the framework of the present invention, a radiation curable coating composition is a coating composition which is cured by using electromagnetic radiation having a wavelength $\lambda \leq 500$ nm or electron beam radiation. An example of electromagnetic radiation having a wavelength $\lambda \leq 500$ nm is, e.g., UV radiation.

In principle any radiation curable resin or mixtures of resins can be used in the top coat used in the process according to the present invention. These resins are present in an amount of 20 to 100 wt.% of the composition. Preferably, the resin is present in an amount of 30 to 90 wt.%, more preferred is an amount of 40 to 90 wt.%.

~~Polyesteracrylate resins were found to be very suitable for use in the top coat~~ composition. Examples of suitable commercially available polyesteracrylate resins are: Crodamer UVP-215, Crodamer UVP-220 (both ex Croda), Genomer 3302, Genomer 3316 (both ex Rahn), Laromer PE 44F (ex BASF), Ebecryl 800, Ebecryl 810 (both ex UCB), Viaktin 5979, Viaktin VTE 5969, and Viaktin 6164 (100%) (all ex Vianova).

Epoxyacrylate resins can also be used in the top coat composition. Examples of commercially available epoxyacrylate resins are: Crodamer UVE-107 (100%), Crodamer UVE-130 (both ex Croda) Genomer 2254, Genomer 2258, Genomer 2260, Genomer 2263 (all ex Rahn), CN 104 (ex Cray Valley), and Ebecryl 3500 (ex UCB).

Polyetheracrylate resins can also be used in the top coat composition. Examples of commercially available polyetheracrylate resins are: Genomer

ACO 2844 PDEP

7

3456 (ex Rahn), Laromer PO33F (ex BASF), Viaktin 5968, Viaktin 5978, and Viaktin VTE 6154 (all ex Vianova).

Urethaneacrylate resins can also be used in the top coat composition. Examples of commercially available urethaneacrylate resins are: CN 934, CN 976, CN 981 (all ex Cray Valley), Ebecryl 210, Ebecryl 2000, Ebecryl 8800 (all ex UCB), Genomer 4258, Genomer 4652, and Genomer 4675 (all ex Rahn).

Another example of radiation curable resins that can be used in the top coat composition used in the process according to the present invention are cationic UV curable resins, such as cycloaliphatic epoxide resins, (Uvacure 1500, Uvacure 1501, Uvacure 1502, Uvacure 1530, Uvacure 1531, Uvacure 1532, Uvacure 1533, Uvacure 1534, Cyacure UVR-6100, Cyacure UVR-6105, Cyacure UVR-6110, and Cyacure UVR-6128, (all ex. UCB Chemicals), or SarCat K126 (ex. Sartomer), acrylate modified cycloaliphatic epoxides, caprolactone-based resins (SR 495 (=caprolactone acrylate ex. Sartomer), Tone 0201 (=caprolactone triol), Tone 0301, Tone 0305, Tone 0310, (all caprolactone triol ex. Union Carbide), aliphatic urethane divinyl ether, aromatic vinyl ether oligomer, bis-maleimide, diglycidyl ether of bisphenol A or neopentyl glycol, hydroxy-functional acrylic monomer, hydroxy-functional epoxide resin, epoxidised linseed-oil, epoxidised polybutadiene, glycidyl ester or partially acrylated bisphenol A epoxy resin.

Further, UV-curable waterborne resins can be used in the top coat composition used in the process according to the present invention, such as aliphatic polyurethane dispersions (Lux 101 VP ex. Alberdingk Boley), in particular (meth)acryloyl-functional polyurethane dispersions. Very good results can be obtained when the (meth)acryloyl-functional polyurethane resins comprises alkylene oxide groups.

ACO 2844 PDEP

8

Other radiation curable compounds that are suitable to be used are, e.g., vinyl ether-containing compounds, unsaturated polyester resins, acrylated polyetherpolyol compounds, (meth)acrylated epoxidised oils, (meth)acrylated hyperbranched polyesters, silicon acrylates, maleimide functional compounds, unsaturated imide resins, compounds suitable for photo-induced cationic curing, or mixtures thereof.

To obtain a suitable application viscosity of the top coat, well-known UV curable monomers can be added as viscosity reducing agents and reactive oligomers. Examples of these reactive oligomers are tripropylene glycol diacrylate (TPGDA), hexanediol diacrylate (HDDA), and 2-hydroxyethyl methacrylate (HEMA).

Further, the composition can comprise a photoinitiator or a mixture of photoinitiators. Examples of suitable photoinitiators that can be used in the radiation curable composition according to the present invention are benzoin, benzoin ethers, benzilketals, α,α -dialkoxyacetophenones, α -hydroxyalkylphenones, α -aminoalkylphenones, acylphosphine oxides, benzophenone, thioxanthenes, 1,2-diketones, and mixtures thereof. It is also possible to use copolymerisable bimolecular photoinitiators or maleimide functional compounds. Co-initiators such as amine based co-initiators can also be present in the radiation curable coating composition. Daylight cure photoinitiators can also be used.

Examples of suitable commercially available photoinitiators are: Esacure KIP 100F and Esacure KIP 150 (both ex Lamberti), Genocure BDK and Velsicure BTF (both ex Rahn), Speedcure EDB, Speedcure ITX, Speedcure BKL, and Speedcure DETX (all ex Lambson), Cyracure UVI-6990, Cyracure UVI-6974, Cyracure UVI-6976, Cyracure UVI-6992 (all ex Union Carbide), and CGI-901, Darocur 184, Darocur 500, Darocur 1000, and Darocur 1173 (all ex Ciba Chemicals).

ACO 2844 PDEP

9

However, the presence of a photoinitiator is not necessary. In general, when electron beam radiation is used to cure the composition, it is not necessary to add a photoinitiator. When UV radiation is used, in general a photoinitiator is added.

- 5 Although the total amount of photoinitiator in the composition is not critical, it should be sufficient to achieve acceptable curing of the coating when it is irradiated. However, the amount should not be so large that it affects the properties of the cured composition in a negative way. In general, the composition should comprise between 0,1 and 10 wt.% of photoinitiator,
- 10 calculated on the total weight of the composition when electromagnetic radiation having a wavelength $\lambda \leq 500$ nm is used to cure the coating.

The composition can also contain one or more fillers or additives. Fillers can be any fillers known to those skilled in the art, e.g., barium sulphate, calcium

15 sulphate, calcium carbonate, silicas or silicates (such as talc, feldspar, and china clay). Additives such as stabilisers, antioxidants, levelling agents, antisetling agents, matting agents, rheology modifiers, surface-active agents, amine synergists, waxes, or adhesion promoters can also be added. In general, the coating composition according to the present invention comprises 0 to 50

20 wt.% of fillers and/or additives, calculated on the total weight of the coating composition.

The top coat composition used in the process according to the present invention can also contain one or more pigments. Pigments known to those skilled in the art can be used in the radiation curable composition according to

25 the present invention. However, care should be taken that the pigment does not show a too high absorption of the radiation used to cure the composition. In general, the composition according to the present invention comprises 0 to 40 wt.% of pigment, calculated on the total weight of the coating composition.

ACO 2844 PDEP

10

The top coat can be applied to the substrate by conventional means, such as, a curtain coater, spray nozzle, roller coater, or flow coater.

Optionally, one or more other coating layers, so called intermediate coating layers, are applied on top of the smooth coating film on top of the surface before a top coat is applied. This is done, for example, to get a better adhesion of the top coat or to obtain a top coat with special properties.

In principle there is no restriction to the coating composition that can be used for the coating layer(s), as long as there is a good adhesion between the coating layer(s) and the coating film on top of the substrate. Both pigmented and pigment free coating compositions can be used. In view of the reduction of the amount of solvent released during the drying and curing of the coating composition, preference is given to the use of a high solids solvent borne coating composition, a waterborne coating composition or a hot melt coating composition. Since the preparation of coated substrates according to the present invention on an industrial scale is preferably done within a relatively short time frame, the curing and drying time of the coating composition should be as short as possible. The curing and drying of the coating composition can be accelerated by heating the substrate, but in view of the heat-sensitive nature of the substrate, this is not always possible. Therefore, preference is given to the use of a radiation curable coating composition.

For the additional intermediate coating layer(s) in principle the same types of coating compositions can be used as for the top coat layer, albeit that it is not necessary that the additional intermediate coating layer(s) and the top coat have the same composition.

To obtain a suitable application viscosity of the intermediate layer(s), well-known UV curable monomers can be added as viscosity reducing agents and reactive oligomers. Examples of these reactive oligomers are tripropylene

ACO 2844 PDEP

11

glycol diacrylat (TPGDA), hexanediol diacrylate (HDDA), and 2-hydroxyethyl methacrylate (HEMA).

The intermediate coating layer(s) can be applied to the substrate by conventional means, such as, a curtain coater, spray nozzle, roller coater, or
5 flow coater.

Optionally, a printing is applied to the substrate before the top coat is applied. This can be done to obtain a substrate with a special surface structure, colouring, or texture.

10

In view of the coating of a wooden, wood-like and/or cellulose containing substrate in an industrial process, preference is given to a process wherein all coating and curing steps are performed on a single production line. In such process the substrate is placed on a belt which moves with a continuous speed.

15 The substrate is then subsequently coated with the press coat, heated and pressed to dry and cure the press coat, optionally coated with additional coating layer(s), heated or treated in another way to cure the optionally present layer(s), optionally printer, coated with a top coat, and heated or treated in another way to cure the top coat.

20

The process according to the present invention wherein a wooden, wood-like and/or cellulose containing substrate is coated by first applying a press coat and thereafter applying other coating layer presents the following advantages in view of a process wherein such press coat is not used:

- 25 - Reduction of the total amount of paint necessary to get a substrate with the same properties and appearance;
- Reduction of the total amount of solvent necessary to get a substrate with the same properties and appearance;
- Reduction of the total amount of energy necessary to get a substrate with
30 the same properties and appearance;

ACO 2844 PDEP

12

- In particular for substrates that are coated with a UV-curable top coat or an intermediate coating, a reduction of the amount of unreacted monomers. These monomers can give health, safety, and environmental problems, e.g., when the substrate is cut or sanded. These problems occur even
5 years after the lacquer has been applied.
- Improvement of the heat resistance of the substrate.

The invention further relates to a wooden, wood-like and/or cellulose containing substrate coated with a press coat and at least one radiation curable coating
10 layer with an amount of unreacted double bonds in the substrate after curing of the radiation curable coating layer as measured by IR-Chromatography of less than 15%, preferably less than 10%, of the total number of double bonds present in the uncured coating composition. This low amount of unreacted
15 double bonds is probably due to the effective sealing of the porous surface of the substrate by using the press coat. Due to this sealing, the penetration of the radiation curable coating layer into the substrate is reduced.

The amount of extractables can be measured by removal of a 5 cm² x 1-2 mm sample from the surface of the substrate, extraction of the sample with dichloromethane and analysis of the dichloromethane containing the
20 extractables by GC/FID in combination with GC/MS.

The invention will be elucidated with reference to the following examples. These are intended to illustrate the invention but are not to be construed as limiting in any manner the scope thereof.

ACO 2844 PDEP

13

Examples

Example 1A

- 5 A Medium Density Fibreboard (MDF) substrate was placed on a belt moving at a speed of 15 m/min and a white pigmented press coat emulsion comprising (pbw denotes parts by weight):

26,7 pbw of water;

20,7 pbw of an acrylic polymer having a T_g of 34°C;

- 10 16,8 pbw of pigment;

31,5 pbw of a mixture of fillers; and

4,3 pbw of a mixture of additives.

was applied to the MDF substrate at 15-20 g/m². The press coat was allowed to dry by passing the MDF substrate through an oven and the press coat was
15 pressed and cured by passing through a pair of calendering rolls at a temperature between 150°C and 200°C and a pressure of about 1 N/mm².

- On top of the thus formed coating film a white pigmented solvent borne top coat (Proff 355 NCS S-0502 Y available from Akzo Nobel Wood Coatings AB Sweden diluted at 50 wt.% solids content) was applied with a curtain coater at
20 100 g/m². The top coat was allowed to cure by passing the substrate through a second oven.

The whole process was performed on a single production line without removing the substrate from the belt.

- 25 Example 1B (comparative)

By way of comparison, using the same conditions a coated MDF substrate was prepared not using a press coat. In a first step a solvent borne sealer coating (Proff Surf 150 available from Akzo Nobel Wood Coatings AB Sweden) was applied, in the second step a white pigmented solvent born top coat of
30 Example 1A was applied at 100 g/m². To obtain a substrate with the same

ACO 2844 PDEP

14

properties and appearance as in Example 1A, the sealer coating had to be applied at 100 g/m².

In comparison to Example 1A, in this comparative example 100% more solvent had to be used to get a coated MDF substrate with the same properties and appearance. Further, in the comparative example the energy consumption of the whole process was higher in view of the larger volume of solvent that had to be evaporated.

Example 2A

10 A Medium Density Fibreboard (MDF) substrate was placed on a belt moving at a speed of 15 m/min and the white pigmented press coat of Example 1A was applied to the MDF substrate at 15-20 g/m². The press coat was allowed to dry by passing the MDF substrate through an oven and the press coat was pressed and cured by passing through a pair of calendering rolls at a temperature
15 between 150°C and 200°C and a pressure of about 1 N/mm².

On top of the thus formed coating film a white pigmented top coat (IC 102 Ickeawhite 5 available from Akzo Nobel Wood Coatings AB Sweden diluted to a solid content of 35 wt.%) was applied with a curtain coater at 100 g/m². The top coat was allowed to cure by passing the substrate through a second oven.

20 The whole process was performed on a single production line without removing the substrate from the belt.

Example 2B (comparative)

By way of comparison, using the same conditions a coated MDF substrate was prepared not using a press coat. In a first step a solvent borne sealer coating
25 (Proff Surf 150 available from Akzo Nobel Wood Coatings AB Sweden) was applied, in the second step a white pigmented top coat of Example 2A was applied at 100 g/m². To obtain a substrate with the same properties and appearance as in Example 2A, the sealer coating had to be applied at 100
30 g/m².

ACO 2844 PDEP

15

In comparison to Example 2A, in this comparative example 100% more solvent had to be used to get a coated MDF substrate with the same properties and appearance. Further, in the comparative example the energy consumption of the whole process was higher in view of the larger volume of solvent that had to be evaporated.

Example 3A

A Medium Density Fibreboard (MDF) substrate was placed on a belt moving at a speed of 15 m/min and the white pigmented press coat of Example 1A was applied to the MDF substrate at 15-20 g/m². The press coat was allowed to dry by passing the MDF substrate through an oven and the press coat was pressed and cured by passing through a pair of calendering rolls at a temperature between 150°C and 200°C and a pressure of about 1 N/mm².

On top of the thus formed coating film a white pigmented water borne top coat (Aqua Täck Line available from Akzo Nobel Wood Coatings AB Sweden) was applied with a curtain coater at 100 g/m². The top coat was allowed to cure by passing the substrate through a second oven.

The whole process was performed on a single production line without removing the substrate from the belt.

Example 3B (comparative)

By way of comparison, using the same conditions a coated MDF substrate was prepared not using a press coat. In a first step a water borne primer coating Aqua Täck Line available from Akzo Nobel Wood Coatings AB Sweden was applied, in the second step the same white pigmented water borne coating was applied as a top coat at 100 g/m². To obtain a substrate with the same properties and appearance as in Example 3A, the primer coating had to be applied at 100 g/m².

ACO 2844 PDEP

16

In comparison to Example 3A, in this comparative example the energy consumption of the whole process was higher in view of the larger volume of water that had to be evaporated.

5 Example 4A

A Medium Density Fibreboard (MDF) substrate was placed on a belt moving at a speed of 15 m/min and the white pigmented press coat of Example 1A was applied to the MDF substrate at 15-20 g/m². The press coat was allowed to dry by passing the MDF substrate through an oven and the press coat was pressed and cured by passing through a pair of calendering rolls at a temperature between 150°C and 200°C and a pressure of about 1 N/mm².

On top of the thus formed coating film the following coating layers were applied:

- a UV sealer (IS 401 UV Sealer available from Akzo Nobel Wood Coatings AB Sweden) was applied with a roller coater at 8 g/m²;
- 15 - a white pigmented UV base coat (UV Basecoat Br. Hvid available from Akzo Nobel Wood Coatings AB Sweden) was applied with a roller coater at 8 g/m²;
- a white pigmented UV base coat (UV Basecoat Br. Hvid available from Akzo Nobel Wood Coatings AB Sweden) was applied with a roller coater at 8 g/m²;
- 20 - a white pigmented top coat (UV top coat Ikea No. 5 available from Akzo Nobel Wood Coatings AB Sweden) was applied with an Optiroller at 23 g/m²;

After application, each coating layer was dried and cured before application of the next layer. The coating layers were allowed to cure by passing the substrate under a UV lamp. Before applying the first layer of the base coat the substrate was sanded.

The whole process was performed on a single production line without removing the substrate from the belt.

30

ACO 2844 PDEP

17

Exempl 4B (comparative)

By way of comparison, using the same conditions a coated MDF substrate was prepared not using a press coat. In a first step a UV putty (IF 401 UV light filler available from Akzo Nobel Wood Coatings AB Sweden) was applied at 20 g/m² and cured.

On top of the cured putty the following coating layers were applied:

- a UV sealer (IS 401 UV Sealer available from Akzo Nobel Wood Coatings AB Sweden) was applied with a roller coater at 8 g/m²;
- a white pigmented UV base coat (UV Basecoat Br. Hvid available from Akzo Nobel Wood Coatings AB Sweden) was applied with a roller coater at 8 g/m²;
- a white pigmented UV base coat (UV Basecoat Br. Hvid available from Akzo Nobel Wood Coatings AB Sweden) was applied with a roller coater at 8 g/m²;
- a white pigmented UV base coat (UV Basecoat Br. Hvid available from Akzo Nobel Wood Coatings AB Sweden) was applied with a roller coater at 8 g/m²;
- a white pigmented top coat (UV top coat Ikea No. 5 available from Akzo Nobel Wood Coatings AB Sweden) was applied with an optiroller at 23 g/m²;

After application, each coating layer was dried and cured before application of the next layer. The coating layers were allowed to cure by passing the substrate under a UV lamp.

The whole process was performed on a single production line without removing the substrate from the belt.

In comparison to Example 4A in this comparative example more paint had to be used to get a substrate with the same properties and appearance resulting in a higher overall cost price. Further, in the coated substrate of Example 4B approximately 20% of the double bonds in the coating composition were not converted, in the coated substrate of Example 4A only 3% of the double bonds

ACO 2844 PDEP

18

in the coating composition were not converted. The conversion of double bonds was measured by IR chromatography.

The amount of not converted double bonds in the coated substrate indicates that the material contains uncured monomeric material.

5

Example 5A

A Medium Density Fibreboard (MDF) substrate was placed on a belt moving at a speed of 15 m/min and the white pigmented press coat of Example 1A was applied to the MDF substrate at 15-20 g/m². The press coat was allowed to dry by passing the MDF substrate through an oven and the press coat was pressed and cured by passing through a pair of calendering rolls at a temperature between 150°C and 200°C and a pressure of about 1 N/mm².

On top of the thus formed coating film a white pigmented water borne primer (IP 610 Aqua Primer 2 available from Akzo Nobel Wood Coatings AB Sweden) was applied with a roller coater at 25 g/m². After drying and curing of the primer, a UV-curable top coat (UV top coat Ikea No. 5 available from Akzo Nobel Wood Coatings AB Sweden) was applied with an optiroller at 5 g/m². The top coat was allowed to cure by passing the substrate under a UV lamp.

The whole process was performed on a single production line without removing the substrate from the belt.

Example 5B (comparative)

By way of comparison, using the same conditions a coated MDF substrate was prepared not using a press coat. In a first step a water borne primer coating (IP 610 Aqua Primer 2 available from Akzo Nobel Wood Coatings AB Sweden) was applied, in the second step a white pigmented UV curable top coat (UV top coat Ikea No. 5 available from Akzo Nobel Wood Coatings AB Sweden) was applied at 5 g/m². To obtain a substrate with the same properties and appearance as in Example 5A, the primer coating had to be applied in 3 passes at 35 g/m².

ACO 2844 PDEP

19

In comparison to Example 5A, in this comparative example the energy consumption of the whole process was higher in view of the larger volume of water that had to be evaporated. Further the paint consumption in the comparative process was higher.

5

Example 6A

A Medium Density Fibreboard (MDF) substrate was placed on a belt moving at a speed of 15 m/min and the white pigmented press coat of Example 1A was applied to the MDF substrate at 15-20 g/m². The press coat was allowed to dry by passing the MDF substrate through an oven and the press coat was pressed and cured by passing through a pair of calendering rolls at a temperature between 150°C and 200°C and a pressure of about 1 N/mm².

On top of the thus formed coating film a UV curable putty (IF 401 UV light filler available from Akzo Nobel Wood Coatings AB Sweden) was applied at 5-15 g/m². The putty was allowed to cure by passing the substrate under a UV lamp. On top of the cured putty a UV curable sealer coating (IS 483 W-W UV Sealer available from Akzo Nobel Wood Coatings AB Sweden) was applied at 6-8 g/m². The sealer was allowed to cure by passing the substrate under a UV lamp. On top of the cured sealer coating a UV curable top coat was (UV top coat Ikea no. 5 available from Akzo Nobel Wood Coatings AB Sweden) applied at 5 g/m². The top coat was allowed to cure by passing the substrate under a UV lamp.

The whole process was performed on a single production line without removing the substrate from the belt.

25

Example 6B (comparative)

By way of comparison, using the same conditions a coated MDF substrate was prepared not using a press coat. To obtain a substrate with the same properties and appearance as in Example 6A, the UV curable putty of Example 6A had to be applied at 15-40 g/m².

30

ACO 2844 PDEP

20

In comparison to Example 6A in this comparative example more paint had to be used to get a substrate with the same properties and appearance resulting in a higher overall cost price. Further, in the coated substrate of Example 6B approximately 25% of the double bonds in the coating composition were not converted, in the coated substrate of Example 6A only 7% of the double bonds in the coating composition were not converted. The conversion of double bonds was measured by IR chromatography. The amount of not converted double bonds in the coated substrate indicates that the material contains uncured monomeric material.

ACO 2844 PDEP

21

Claims

1. Process for the coating of a wooden, wood-like and/or cellulose containing substrate comprising the steps of:
 - 5 a) applying a press coating to the substrate;
 - b) applying heat and pressure to the coated substrate to cure the press coating and to obtain a substrate with a smooth coating film, whereby the pressure is such that the substrate is not substantially compressed;
 - 10 c) applying a top coat on the substrate after the curing of the press coating; and
 - d) curing said top coat.
2. Process according to claim 1, characterized in that in an additional step before the top coat is applied, a primer coating is applied and cured.
- 15 3. Process according to claim 1 or 2, characterized in that all process steps are performed on a single production line.
4. Process according to claim any of the preceeding claims, characterized in that the top coat is a radiation curable top coat and that the radiation curable top coat is cured using UV radiation.
- 20 5. Process according to any of the preceeding claims, characterized in that before the top coat is applied a printing is applied on the substrate and that the top coat is applied on top of said printing.
- 25 6. Process according to any of the preceeding claims, characterized in that the press coat is a aqueous colloidal dispersion comprising particles of a polymer of an ethylenically unsaturated monomer and 40 - 60 wt.% based on the total weight of the emulsion solids of filler and/or pigment.
- 30

ACO 2844 PDEP

22

7. A wooden, wood-like and/or cellulose containing substrate coated with a press coat and at least one radiation curable coating layer comprising unreacted double bonds wherein the amount of unreacted double bonds in the substrate after curing of the radiation curable coating layer as measured by IR-Chromatography is less than 15% of the total number of double bonds present in the uncured coating composition.
8. Substrate according to claim 8, characterized in that the amount of unreacted double bonds in the substrate as measured by IR-Chromatography is less than 10% of the total number of double bonds present in the uncured coating composition.

ACO 2844 PDEP

23

Abstract

The invention relates to a process for the coating of a wooden, wood-like and/or cellulose containing substrate comprising the steps of:

- 5 a) applying a press coating to the substrate;
- b) applying heat and pressure to the coated substrate to cure the press coating and to obtain a substrate with a smooth coating film;
- c) applying a top coat on the substrate after the curing of the press coating; and
- 10 d) curing said top coat.

As a result of this process, the level of unreacted double bonds in coated is at a low level.

15

THIS PAGE BLANK (USPTO)